


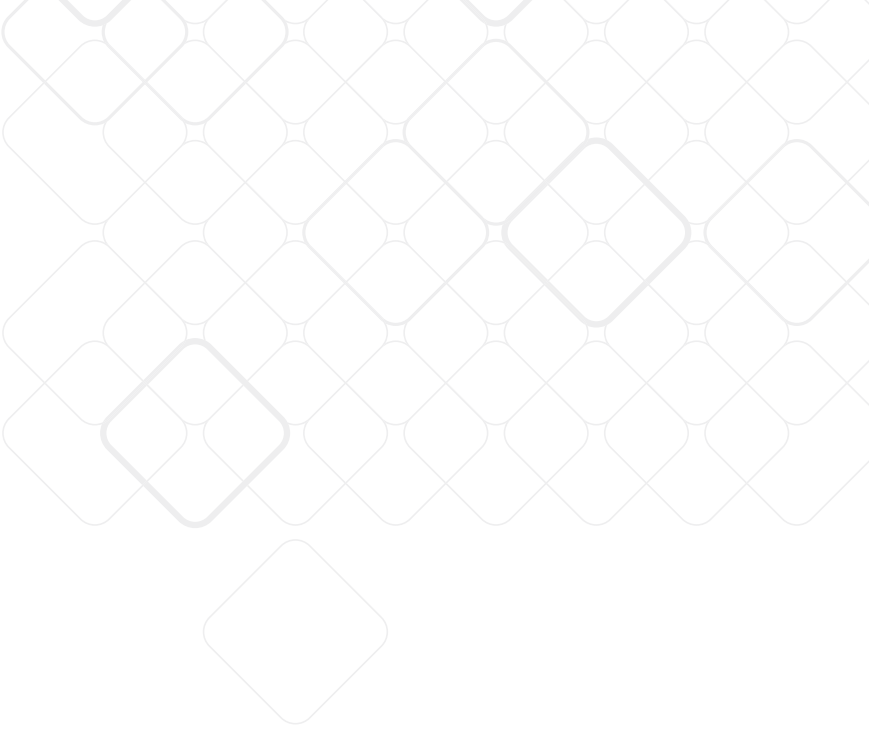

centerline

Simply designed. To be the best. **For you.**

2025 FULL LINE CATALOG

BROUGHT TO YOU BY



Simply designed. To be the best. **For you.**

Centerline™ by Hobart introduces simple and affordable food preparation and dishwashing equipment backed by the quality and reliability you've come to expect from the Hobart name.



Keep Your Cool **without Compromise**

Centerline™ by Traulsen delivers reliable refrigeration designed to help operators succeed as their kitchens grow and evolve by providing long lasting performance at a budget friendly price.

CENTERLINE™ BY TRAULSEN

General Information –

- Understanding Centerline™ by Traulsen Model Numbers10
- Centerline™ Tray Slide & Shelf Versatility Chart.11

CLBM Series Refrigerators & Freezers

- Reach-In Solid Door Models 4
- Reach-In Glass Door Models 5

CLUC Series Refrigerators & Freezers

- Compact Undercounter Models 6
- Compact Undercounter Glass Door Models 7

CLPT Series Refrigerators

- Compact Prep Table Models 8

CLBC Series Blast Chillers

- Undercounter & Reach-In Models 9

CENTERLINE™ BY HOBART

- HMM10 & HMM20 Planetary Mixers 12-13
- EDGE Series Slicers14
- CCH32 & CCH34 Food Processors15
- CUH & CUL Undercounter Dishwashers16
- CDH & CDL Door-Type Dishwashers17

STANDARD FEATURES

- + Balanced refrigeration system with oversized evaporator coil
- + Stainless steel front & sides
- + Corrosion resistant anodized aluminum interior
- + Environmentally friendly R-290 refrigerant
- + LED display control
- + Bottom-mounted refrigeration system
- + Field re-hinge feature standard on one section models
- + Brazed system connections
- + Capillary tube metering device (TXV on freezers)
- + Self-closing door(s) with stay-open feature & lock(s)
- + Magnetic snap-in EZ-Clean™ door gasket(s)
- + Gasket protecting retainer
- + Four 4" high casters with locks on front casters
- + Three heavy duty epoxy coated shelves per section on pins
- + 115/60/1 voltage, self-contained, with cord & plug attached
- + Six-year parts & labor warranty
- + Seven-year compressor warranty (seventh year is parts only)



CLBM-23R-HS-R



CLBM-49F-FS-LR



ONE SECTION SOLID DOOR REACH-IN MODELS

WIDTH x DEPTH x HEIGHT*	DOOR HEIGHT	DOOR HINGING	REFRIGERATORS	FREEZERS
27" x 33.5" x 78"	Full	Right	CLBM-23R-FS-R	CLBM-23F-FS-R
	Full	Left	CLBM-23R-FS-L	CLBM-23F-FS-L
	Half	Right	CLBM-23R-HS-R	CLBM-23F-HS-R
	Half	Left	CLBM-23R-HS-L	CLBM-23F-HS-L

TWO SECTION SOLID DOOR REACH-IN MODELS

WIDTH x DEPTH x HEIGHT*	DOOR HEIGHT	DOOR HINGING	REFRIGERATORS	FREEZERS
53.7" x 33.5" x 78"	Full	Left/Right	CLBM-49R-FS-LR	CLBM-49F-FS-LR
	Full	Right/Right	CLBM-49R-FS-RR	CLBM-49F-FS-RR
	Full	Left/Left	CLBM-49R-FS-LL	CLBM-49F-FS-LL
	Half	Left/Right	CLBM-49R-HS-LR	CLBM-49F-HS-LR
	Half	Right/Right	CLBM-49R-HS-RR	CLBM-49F-HS-RR
	Half	Left/Left	CLBM-49R-HS-LL	CLBM-49F-HS-LL

*NOTE: Height without 4" standard casters



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

STANDARD FEATURES

- + Balanced refrigeration system with oversized evaporator coil
- + Stainless steel front & sides
- + Corrosion resistant anodized aluminum interior
- + LED display control
- + Bottom-mounted refrigeration system
- + Magnetic snap-in EZ-Clean™ door gasket(s)
- + Self-closing door(s) with stay-open feature & lock(s)
- + Environmentally friendly R-290 refrigerant
- + In-field re-hinge feature standard on one section models
- + Brazed system connections
- + Capillary tube metering device (TXV on freezers)
- + Gasket protecting retainer
- + Metal door handle(s)
- + Four 4" high casters with locks on front casters
- + Three heavy duty epoxy coated shelves per section
- + 115/60/1 voltage, self-contained, with cord & plug attached
- + Six-year parts & labor warranty
- + Seven-year compressor warranty (seventh year is parts only)



CLBM-23R-FG-R



CLBM-49F-FG-LR



ONE SECTION GLASS DOOR REACH-IN REFRIGERATOR MODELS

WIDTH x DEPTH x HEIGHT*	DOOR HEIGHT	DOOR HINGING	REFRIGERATORS
27" x 33.5" x 78"	Full	Right	CLBM-23R-FG-R
	Full	Left	CLBM-23R-FG-L
	Half	Right	CLBM-23R-HG-R
	Half	Left	CLBM-23R-HS-L

TWO SECTION GLASS DOOR REACH-IN REFRIGERATOR MODELS

WIDTH x DEPTH x HEIGHT*	DOOR HEIGHT	DOOR HINGING	REFRIGERATORS
53.7" x 33.5" x 78"	Full	Left/Right	CLBM-49R-FG-LR
	Full	Right/Right	CLBM-49R-FG-RR
	Full	Left/Left	CLBM-49R-FG-LL
	Half	Left/Right	CLBM-49R-HG-LR
	Half	Right/Right	CLBM-49R-HG-RR
	Half	Left/Left	CLBM-49R-HG-LL

*NOTE: Height without 4" standard casters



Please refer to energystar.gov to view the most up-to-date product listing and performance data.

STANDARD FEATURES

- ✦ Stainless steel exterior with corrosion resistant anodized aluminum interior
- ✦ External LED display control
- ✦ Self-closing door(s) with stay-open feature (door models)
- ✦ Each drawer accommodates full size 6" deep pans (drawer models)
- ✦ Fully removable drawers (on drawer models)
- ✦ Gasket protecting retainer
- ✦ Magnetic snap-in door gasket(s)
- ✦ Front breathing, zero clearance
- ✦ Door re-hinge feature on all sizes for flexibility
- ✦ Capillary tube metering device
- ✦ Environmentally friendly R-290 refrigerant
- ✦ Worktop models available
- ✦ Four or six 4" high casters with locks on front casters, pre-installed on device
- ✦ Two heavy duty epoxy coated shelves per section (door models)
- ✦ 115/60/1 voltage, self-contained, with cord & plug attached
- ✦ Six-year parts & labor warranty
- ✦ Seven-year compressor warranty (seventh year is parts only)



CLUC-27R-SD-L



CLUC-48R-DW



CLUC-48R-SD-LR



COMPACT UNDERCOUNTER DOOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT*	NUMBER OF DOORS	DOOR HINGING	REFRIGERATORS	FREEZERS
27.5" x 31.5" x 30"	1	L/R	CLUC-27R-SD	CLUC-27F-SD
36.25" x 31.5" x 30"	2	LR/LL/RR	CLUC-36R-SD	CLUC-36F-SD
48.25" x 31.5" x 30"	2	LR/LL/RR	CLUC-48R-SD	CLUC-48F-SD
60.25" x 31.5" x 30"	2	LR/LL/RR	CLUC-60R-SD	CLUC-60F-SD
72.19" x 31.5" x 30"	3	LRR/LLL/RRR	CLUC-72R-SD	CLUC-72F-SD

COMPACT UNDERCOUNTER DRAWER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT*	NUMBER OF DRAWERS	DOOR HINGING	REFRIGERATORS	FREEZERS
27.5" x 31.5" x 30"	2	(1) Full Size	CLUC-27R-DW	CLUC-27F-DW
48.25" x 31.5" x 30"	4	(1) 1/2 Pan & (1) 1/3 Pan	CLUC-48R-DW	CLUC-48F-DW
60.25" x 31.5" x 30"	4	(1) Full Size	CLUC-60R-DW	CLUC-60F-DW
72.25" x 31.5" x 30"	6	(1) 1/2 Pan & (1) 1/3 Pan	CLUC-72R-DW	N/A

NOTE: All models available with worktop (height increases by 4 inches)

***NOTE:** Height without 4" standard casters



Please refer to energystar.gov to view the most up-to-date product listing and performance data.



CLUC-27R-GD-L



CLUC-60R-GD-LR



CLUC-72R-GD-LRR

STANDARD FEATURES

- + Stainless steel exterior with corrosion resistant anodized aluminum interior
- + Metal door handle(s)
- + Stay-open door(s) feature
- + External LED display control
- + Magnetic snap-in door gasket(s)
- + Front breathing, zero clearance
- + Capillary tube metering device
- + Environmentally friendly R-290 refrigerant
- + Worktop models available
- + Four or six 4" high casters with locks on front casters, pre-installed on device
- + Two heavy duty epoxy coated shelves per door
- + 115/60/1 voltage, self-contained, with cord & plug attached
- + Six-year parts & labor warranty
- + Seven-year compressor warranty (seventh year is parts only)



COMPACT UNDERCOUNTER GLASS DOOR REFRIGERATOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT*	NUMBER OF DOORS	DOOR HINGING	REFRIGERATORS
27.5" x 33" x 30"	1	L/R	CLUC-27R-GD
36.25" x 33" x 30"	2	LR/LL/RR	CLUC-36R-GD
48.25" x 33" x 30"	2	LR/LL/RR	CLUC-48R-GD
60.25" x 33" x 30"	2	LR/LL/RR	CLUC-60R-GD
72.25" x 33" x 30"	3	LRR/LLL/RRR	CLUC-72R-GD

NOTE: All models available with worktop (height increases by 4 inches)

***NOTE:** Height without 4" standard casters



Please refer to energystar.gov to view the most up-to-date product listing and performance data.



CLPT-2708-SD-L



CLPT-4818-SD-LR



CLPT-7230-DW

STANDARD FEATURES

- ✦ Stainless steel exterior with corrosion resistant anodized aluminum interior
- ✦ Exterior LED display control
- ✦ Chambered airflow
- ✦ Capillary tube metering device
- ✦ 4" pans provided standard, holds 6" pan capacity
- ✦ Insulated lid
- ✦ Door re-hinge feature on all sizes for flexibility
- ✦ Fully removable drawers (on drawer models)
- ✦ Front-breathing, zero clearance
- ✦ White poly cutting board 12" on standard models, 8" on megatop models
- ✦ Environmentally friendly R-290 refrigerant
- ✦ Worktop models available
- ✦ Self-closing door(s) with stay-open feature
- ✦ Recessed door handle provides easy grip
- ✦ Gasket protecting retainer
- ✦ Magnetic snap-in door gasket(s)
- ✦ Four or six 4" high casters with locks on front casters, pre-installed on device
- ✦ Two heavy duty epoxy coated shelves on pilasters (door models)
- ✦ 115/60/1 voltage, self-contained, with cord & plug attached
- ✦ Six-year parts & labor warranty
- ✦ Seven-year compressor warranty (seventh year is parts only)



COMPACT PREP TABLE DOOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT*	NUMBER OF DOORS	HINGING	REFRIGERATORS	PAN CAPACITY (1/6)
27.88" x 32.75" x 40"	1	L/R	CLPT-2708-SD	8
36.56" x 32.75" x 40"	2	LR/LL/RR	CLPT-3610-SD	10
48.56" x 32.75" x 40"	2	LR/LL/RR	CLPT-4812-SD	12
60.56" x 32.75" x 40"	2	LR/LL/RR	CLPT-6016-SD	16
72.5" x 32.75" x 40"	3	LRR/LLL/RRR	CLPT-7220-SD	20

COMPACT PREP TABLE DRAWER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT*	NUMBER OF DRAWERS	REFRIGERATORS	PAN CAPACITY (1/6)
27.88" x 32.75" x 40"	2	CLPT-2708-DW	8
48.56" x 32.75" x 40"	4	CLPT-4812-DW	12
60.56" x 32.75" x 40"	4	CLPT-6016-DW	16
72.5" x 32.75" x 40"	6	CLPT-7220-DW	20

COMPACT PREP TABLE MEGA TOP DOOR MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT*	NUMBER OF DOORS	HINGING	REFRIGERATORS	PAN CAPACITY (1/6)
27.88" x 32.75" x 40"	1	L/R	CLPT-2712-SD	12
36.56" x 32.75" x 40"	2	LR/LL/RR	CLPT-3615-SD	15
48.56" x 32.75" x 40"	2	LR/LL/RR	CLPT-4818-SD	18
60.56" x 32.75" x 40"	2	LR/LL/RR	CLPT-6024-SD	24
72.5" x 32.75" x 40"	3	LRR/LLL/RRR	CLPT-7230-SD	30

COMPACT PREP TABLE MEGA TOP DRAWER MODELS, SELF-CONTAINED

WIDTH x DEPTH x HEIGHT*	NUMBER OF DRAWERS	REFRIGERATORS	PAN CAPACITY (1/6)
27.88" x 32.75" x 40"	2	CLPT-2712-DW	12
48.56" x 32.75" x 40"	4	CLPT-4818-DW	18
60.56" x 32.75" x 40"	4	CLPT-6024-DW	24
72.5" x 32.75" x 40"	6	CLPT-7230-DW	30

*NOTE: Height without 4" standard casters



CLBC7-L



CLBC4-R



CLBC4-WT-R

STANDARD FEATURES

- ✚ Stainless steel exterior and interior
- ✚ TXV metering device
- ✚ Stay-open/self-closing door
- ✚ Recessed handle for easy grip
- ✚ 2³/₈" thick high density insulation
- ✚ One food probe
- ✚ 2 Chill Modes: Soft or hard chill
- ✚ Front mounted control, easy-to-use digital control
- ✚ Quickly chill hot food to below 41°F in 90 minutes (chill times will vary depending on product type, quantity, and container used)
- ✚ Four 4" casters, two with locks, two without
- ✚ Magnetic snap-in door gasket(s)
- ✚ Two heavy duty epoxy shelves per door, mounted on pilasters & clips
- ✚ Three-year evaporator coil parts & labor warranty
- ✚ Six year parts & labor warranty
- ✚ Seven-year compressor warranty (seventh year is parts only)



REACH-IN BLAST CHILLERS

WIDTH x DEPTH x HEIGHT*	CAPACITIES	DOOR HINGING	REFRIGERATORS	TYPE
34.75" x 38.13" x 61.56"	(7) 18" x 26" or (14) 12" x 20" Pans	Left	CLBC7-L	Reach-In
34.75" x 38.13" x 61.56"	(7) 18" x 26" or (14) 12" x 20" Pans	Right	CLBC7-R	Reach-In

UNDERCOUNTER BLAST CHILLERS

WIDTH x DEPTH x HEIGHT*	CAPACITIES	DOOR HINGING	REFRIGERATORS	TYPE
54.13" x 35.94" x 28"	(4) 18" x 26" or (8) 12" x 20" Pans	Left	CLBC4-L	Reach-In
54.13" x 35.94" x 28"	(4) 18" x 26" or (8) 12" x 20" Pans	Right	CLBC4-R	Reach-In
54.13" x 35.94" x 32"	(4) 18" x 26" or (8) 12" x 20" Pans	Left	CLBC4-WT-L	Worktop
54.13" x 35.94" x 32"	(4) 18" x 26" or (8) 12" x 20" Pans	Right	CLBC4-WT-R	Worktop

*NOTE: Height without 4" standard casters

Centerline™ by Traulsen Reach-Ins, Compacts & Prep Tables

CENTERLINE™ REACH-INS

CL	BM-	23	R-	FS-	L
SERIES	SYSTEM LOCATION/TYPE	CABINET WIDTH (SECTIONS)	TYPE OF CABINET	TYPE OF DOOR(S)	HINGING
Position (1)	Position (2)	Position (3)	Position (4)	Position (5)	Position (6)
CL Centerline™	BM Bottom Mounted Self-Contained	23 23" (1-section) 49 49" (2-section)	R Refrigerator F Freezer	FS Full-Height Solid HS Half-Height Solid FG Full-Height Glass HG Half-Height Glass	L Left R Right LR Left/Right LL Left/Left RR Right/Right

CENTERLINE™ COMPACTS


CL	UC-	27	R-	SD-	L
SERIES	SYSTEM LOCATION/TYPE	CABINET WIDTH (SECTIONS)	TYPE OF CABINET	TYPE OF DOOR(S)	HINGING
Position (1)	Position (2)	Position (3)	Position (4)	Position (5)	Position (6)
CL Centerline™	UC Undercounter	27 27" 36 36" 48 48" 60 60" 72 72"	R Refrigerator F Freezer	SD Solid Door(s) GD Glass Door(s) DW Drawers	L Left R Right LR Left/Right LL Left/Left RR Right/Right LRR Left/Right/Right RRR Right/Right/Right LLL Left/Left/Left WT If WT is present, the Undercounter is a Worktop

CENTERLINE™ PREP TABLES


CL	PT-	27	12-	SD-	L
SERIES	SYSTEM LOCATION/TYPE	CABINET WIDTH (SECTIONS)	NUMBER OF PANS	TYPE OF DOOR(S)	HINGING
Position (1)	Position (2)	Position (3)	Position (4)	Position (5)	Position (6)
CL Centerline™	PT Prep Table	27 27" 36 36" 48 48" 60 60" 72 72"	8 8 Pans 10 10 Pans 12 12 Pans 15 15 Pans 16 16 Pans 18 18 Pans 20 20 Pans 24 24 Pans 30 30 Pans	SD Solid Door(s) DW Drawers	L Left R Right LR Left/Right LL Left/Left RR Right/Right LRR Left/Right/Right RRR Right/Right/Right LLL Left/Left/Left

CENTERLINE™ BLAST CHILLERS

CL	BC	7-	L
SERIES	CABINET TYPE	REACH-IN/UNDERCOUNTER & NO. OF SHEET PANS	HINGING
Position (1)	Position (2)	Position (3)	Position (4)
SERIES	BC Blast Chiller	7 Reach-In, (7) 18" x 26" Sheet Pans 4 Undercounter, (4) 18" x 26" Sheet Pans	L Left R Right WT If WT is present, the Undercounter is a Worktop
CL Centerline™			



**#1 TRAYSLIDES
STANDARD**



UNIVERSAL TRAYSLIDES STANDARD

NOTES:

1. For all after market parts call Traulsen parts department at 800-825-8220.
2. The above quantities represent the maximum amount of trayslides recommended by Traulsen to achieve best air circulation and refrigeration performance.
3. Optional trayslides are not available for Compact Undercounter, and Prep Table models.
4. All Centerline™ by Traulsen accessory kits are pre-packaged for easy installation at the job site.

TRAYSLIDES

DESCRIPTION	SPACING			
#1 TRAYSLIDES – STANDARD				
16 ga. Stainless steel angle type for bottom support of: (1) 18" x 26" Pan	2"	3"	4"	5"
Behind full-height door – all models	26	17	13	10
Behind upper half-height door – all models	12	8	6	4
Behind lower half-height door – all models	12	8	6	5
UNIVERSAL TRAYSLIDES – STANDARD				
16 ga. stainless steel angle type for bottom support of: (1) 18" x 26" Pan or (2) 12" x 20" Pans)	4"	5"	6"	
Behind full-height door – all models	13	10	8	
Behind upper half-height door – all models	6	4	4	
Behind lower half-height door – all models	6	5	4	

SHELVES

CAPACITY	STD.	MAX.
Behind full-height door mounted on standard shelf pins	3	8
Behind half-height door mounted on standard shelf pins	3	7
Behind full-height door mounted on optional pilasters	3	12 (4" spacing)
Behind half-height door mounted on optional pilasters	3	11 (4" spacing)

Listed by ETL, Certified by NSF

STANDARD FEATURES

PERFORMANCE

- + All gear transmission
- + 3 fixed speeds
- + $\frac{3}{4}$ HP heavy-duty motor – the power needed to mix a variety of items

SANITATION & CLEANING

- + Stainless steel removable bowl guard – makes clean-up easy and thorough
- + Clean and contemporary DuoTone finish

EASE OF USE

- + Bayonet style agitators – easy to remove and operate
- + Digital timer with Last Time Remind – remembers the last time set, makes mixing multiple batches a snap!
- + Ergonomic bowl lift with EZ Grip handle – lift and lower the bowl with ease

OPERATOR ASSURANCE

- + Triple interlock system – bowl in place and raised, bowl guard closed
- + GearSafe™ technology – protects system gears from shearing if speeds are changed while in operation



HMM10

HMM10 Accessories



BOWL-HMM10
Stainless Steel Bowl



BEATER-HMM10
Flat Beater



WHIP-HMM10
Wire Whip



DOUGH-HMM10
Dough Hook

Listed by ETL, Certified by NSF

STANDARD FEATURES

PERFORMANCE

- + All gear transmission
- + 3 fixed speeds
- + ½ HP heavy-duty motor – the power needed to mix a variety of items



SANITATION & CLEANING

- + Stainless steel removable bowl guard – makes clean-up easy and thorough
- + Clean and contemporary DuoTone finish



EASE OF USE

- + Bayonet style agitators – easy to remove and operate
- + Digital timer with Last Time Remind – remembers the last time set, makes mixing multiple batches a snap!
- + Ergonomic bowl lift with EZ Grip handle – lift and lower the bowl with ease



OPERATOR ASSURANCE

- + Triple interlock system – bowl in place and raised, bowl guard closed
- + GearSafe™ technology – protects system gears from shearing if speeds are changed while in operation



HMM20

HMM20 Accessories



BOWL-HMM20
Stainless Steel Bowl




BEATER-HMM20
Flat Beater



WHIP-HMM20
Wire Whip



DOUGH-HMM20
Dough Hook



CHUTE-HMM20
Ingredient Chute



JDOUGH-HMM20
J Hook

Listed by ETL, Certified by NSF



EDGE10



EDGE12



EDGE13



EDGE14



EDGE13A

STANDARD FEATURES

PERFORMANCE

Knife Size

- + **EDGE10:** 10" chrome-plated carbon steel knife
- + **EDGE12:** 12" chrome-plated carbon steel knife
- + **EDGE13 & EDGE13A:** 13" chrome-plated carbon steel knife
- + **EDGE14:** 14" chrome-plated carbon steel knife

Motor

- + **EDGE10:** 1/3 HP motor
- + **EDGE12, EDGE13, EDGE13A, EDGE14:** 1/2 HP motor

All Models

- + Hobart poly-v belt drive system

SANITATION & CLEANING

All Models

- + Anodized aluminum base
- + Removable carriage
- + Removable meat grip assembly
- + Removable product deflector

EASE OF USE

All Models

- + Double-sided meat grip and slide rod
- + Top-mounted sharpener with ceramic stone – sharpen and hone in one step

OPERATOR ASSURANCE

All Models

- + No-volt release
- + Gauge-plate interlock
- + Permanently mounted ring guard

EDGE13A

- + Carriage interlock

MODEL NO.	EDGE10	EDGE12	EDGE13	EDGE14	EDGE13A
Motor	1/3 H.P.	1/2 H.P.	1/2 H.P.	1/2 H.P.	1/2 H.P.
Electrical	120/60/1	120/60/1	120/60/1	120/60/1	120/60/1
Carriage Capacity	8" wide x 6" high or 7" diameter	10" wide x 6" high or 8" diameter	9 1/2" wide x 7" high or 8 1/2" diameter	11" wide x 8 1/2" high or 8 1/2" diameter	9 1/2" wide x 7" high or 8 1/2" diameter
Type of Operation	Manual	Manual	Manual	Manual	Automatic
Slice Thickness	3/16"	3/16"	3/16"	3/16"	3/16"
Finish	Anodized Aluminum	Anodized Aluminum	Anodized Aluminum	Anodized Aluminum	Anodized Aluminum
Shipping Weight Approximate	49 lbs.	85 lbs.	89 lbs.	97 lbs.	123 lbs.

Listed by UL, Certified by NSF



CCH32



CCH34

STANDARD FEATURES

PERFORMANCE

Motor

- + 1.34 HP motor

Knife Speed

- + **CCH32:** Knife speed of 1450 RPM
- + **CCH34:** Knife speed of 1450/2650 RPM

Plate Speed

- + **CCH32:** Cutting tool speeds of 500 RPM
- + **CCH34:** Cutting tool speeds of 500/800 RPM

Controls

- + **CCH32:** Two speeds with SureSense™ controls
- + **CCH34:** Four speeds with SureSense™ controls

Processing Options

- + **CCH32:** Multiple vegetable prep processing options (slice, crimp, julienne, shred, and grate)
- + **CCH34:** Multiple vegetable prep processing options (slice, crimp, julienne, shred, grate, and **dice**)

All Models

- + Multiple bowl processing options (chop, mix, grind, puree, blend, mince)
- + 3.2 qt. stainless steel bowl
- + Sealed bowl, cover interface
- + Stainless steel processing plates
- + 4.4 lb./minute capacity
- + Half moon hopper with continuous feed tube

SANITATION & CLEANING

- + **CCH32:** Heavy-duty plastic base
- + **CCH34:** Heavy-duty aluminum base
- + Bowl wiper system

EASE OF USE

- + Compact design

OPERATOR ASSURANCE

- + Double interlock system

MODEL NO.	CCH32	CCH34
Capacity		
Continuous Feed	4.4 lbs./minute	4.4 lbs./minute
Bowl	3.2 quarts	3.2 quarts
Electrical	120/60/1, 9 Amps	120/60/1, 9 Amps
Overall Dimensions		
Width x Depth x Height – Continuous Feed	11" x 13¾" x 23"	11" x 13¾" x 23"
Width x Depth x Height – Bowl	11" x 13" x 17"	11" x 13" x 17"
Net Weight/	23 lbs.	23 lbs.
Shipping Weight	33 lbs.	33 lbs.

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004



CUH/CUL

STANDARD FEATURES

- + 24 racks per hour
- + .84 gallons of water per rack
- + High temperature sanitizing (CUH model only)
- + Chemical sanitizing (CUL model only)
- + Top-mounted user interface with digital temperature display
- + 2-minute cycle with optional extended cycle
- + 14.46" door opening
- + Snap-in, revolving upper and lower anti-clogging wash & rinse arm; low-profile, single-arm design
- + Sense-A-Temp™ 70°F rise booster (CUH model only)
- + Removable, 3-part stainless steel scrap screen
- + Soft start
- + Automatic pumped drain
- + Automatic fill
- + Service diagnostics with error notifications
- + Delime notification and cycle
- + Chemical pumps standard
- + Sanitizer sensing indicator standard (CUL model only)
- + Electric tank heat
- + Two dishracks – one peg and one combination type

MODEL NO.	CUH	CUL
Machine Ratings		
Racks per Hour Rate	24	24
Tank Capacity – Gallons	5.3	5.3
U.S. Gallons per Hour	20.2	20.2
U.S. Gallons per Rack	0.84	0.84
Cycle Time – Seconds	120	120
Wash Motor – H.P.	0.62	0.62
Rinse Motor – H.P.	0.20	0.20
Peak Rate of Drain Flow – Gallons per minute (Initial rate with full tank)	2.8	2.8
Wash Temperature	150°	120°
Rinse Temperature	180°	120°
Incoming Water Temperature Required (minimum)	110°	120°
Tank Heat Electric	5.5 KW	2.0 KW
Electric Booster Heater	6.0 KW	N/A
Shipping Weight Crated (approximate)	148 lbs.	148 lbs.
Crated Dimensions (H x W x D)	38 ³ / ₄ " x 27 ¹ / ₄ " x 26 ¹ / ₂ "	38 ³ / ₄ " x 27 ¹ / ₄ " x 26 ¹ / ₂ "

Listed by UL, Certified by NSF, and meets requirements of ASSE Standard No. 1004



CDH



CDL

STANDARD FEATURES

- + Top mounted digital display
- + Pumped drain
- + 3-phase single point connection standard (CDH model only)
- + 4-sided door
- + Recirculating design
- + Hot water sanitizing with pumped rinse (CDH model only)
- + 51 racks per hour at .86 (CDL) & .73 (CDH) gallons per rack
- + 18" pillarless opening
- + Chemical sanitizing with built-in chemical pumps standard (CDL model only)
- + Sense-A-Temp™ 70° rise booster (CDH model only)
- + 1 standard cycle with optional extended cycle
- + Delime notification and cycle
- + Electric tank heat
- + Door actuated start

MODEL NO.	CDH	CDL
Racks per Hour (maximum)	51	51
Dishes per Hour (average 25 per rack)	1,275	1,275
Glasses per Hour (average 45 per rack)	2,295	2,295
Wash Tank (U.S. gallons)	7.9	4
Rinse Pump – H.P.	0.25	N/A
Wash Pump – H.P.	0.8	0.52
Drain Pump – H.P.	0.04	0.04
Rinse Gallons per Rack	0.73	0.86
Gallons per Hour (maximum consumption)	37.2	43.9
Peak Rate of Drain Flow (gallons per minute)	15	3.5
Electric Booster Heater (kW)	6.5	N/A
Electric Heating (kW)	5	2
Shipping Weight (approximate)	232 lbs.	214 lbs.
Crated Dimensions (H x W x L)	90" x 30" x 33"	90" x 30" x 33"



centerline

701 South Ridge Avenue
Troy, Ohio 45373

937 332-3000
888 446-2278 (888 4HOBART)

www.centerlinefoodequipment.com